

# SL12025TIF - 2" Directional, Square

## Product Features:

- 120V 25W max.
- Shallow 4 ¼" depth housing
- IC Air Tight housing

WORKS WITH  
**SORAA**<sup>®</sup>



## Product Specifications:

### Housing

- Powder coated steel construction.
- Insulation Contact (IC) rated.
- Air Tight as per ASTM E283 Standard.
- Approved for use in dry and damp locations.
- Approved for feed-through wiring.
- 4 ¼" housing depth.

### Trim

- Square. Directional. Single gimbal 20° tilt.
- Powder Coated. Brushed finishes are sealed.
- Finishes available: Black (BL), Brushed Steel (BS), Bronze (BZ), Chrome (CH), White (WH).
- Lamp secured with wire retaining clip.

### Warranty

- Two year warranty against manufacturer defects in material or workmanship. Please refer to our Terms of Sale for full warranty terms and conditions.

### Mounting

- Installs into ¾" - 1 ¼" ceiling thickness.
- Installs into 3" diameter hole.
- New Construction Mounting Plate (NCMP 3000) available. Comes with hanger bars.
- **WARNING:** Cannot be directly covered in polycell spray-in foam insulation.


### Lamp

- 120V 25W max. GU10 based lamp.
- Recommended lamp: 120V 9W max. Soraa LED lamp.
- Halogen alternative: 120V 25W max. aluminum backed lamp.



## SL12025TIF - 2" Directional, Square

### Product Dimensions:

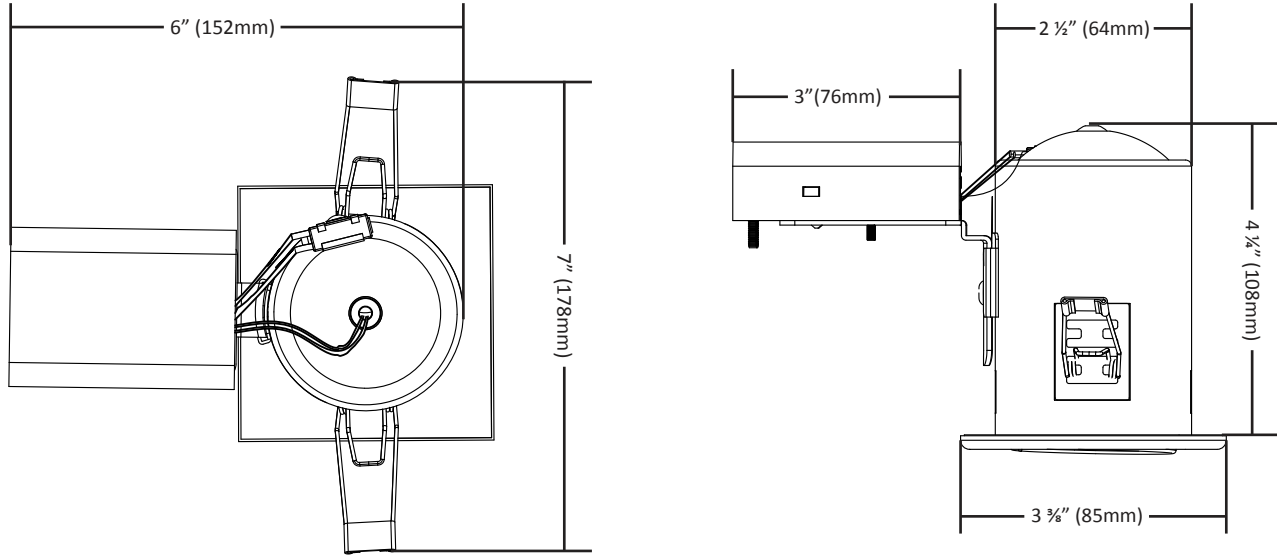


### Accessories:

**NCMP 3000** - New Construction Mounting Plate  
Steel construction. 3" ø hole. Comes with hanger bars.



### Ordering Code:

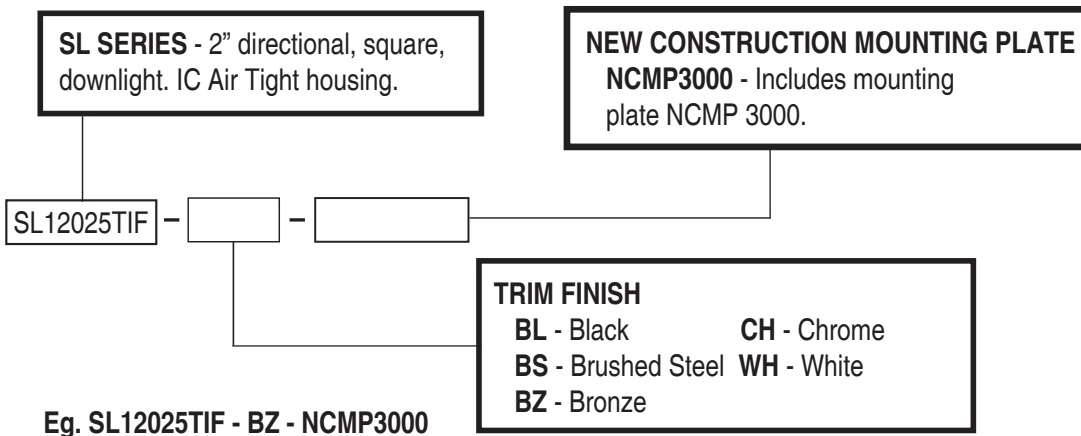

# SL12025TIF - 2" Directional, Square

## Reccomended Soraa LEDs:

### Soraa Vivid 95 CRI\*:

Model	CCT (K)	Beam (°)	Power (W)	Lumens (lm)	CBCP
SM16GA-09-25D-927-03	2700K	25°	9W	465	2570
SM16GA-09-36D-927-03	2700K	36°	9W	465	1210
SM16GA-09-60D-927-03	2700K	60°	9W	465	470
SM16GA-09-25D-930-03	3000K	25°	9W	490	2700
SM16GA-09-36D-930-03	3000K	36°	9W	490	1280
SM16GA-09-60D-930-03	3000K	60°	9W	490	500

### Soraa Brilliant 85 CRI\*:

Model	CCT (K)	Beam (°)	Power (W)	Lumens (lm)	CBCP
SM16GA-09-25D-827-03	2700K	25°	9W	560	3090
SM16GA-09-36D-827-03	2700K	36°	9W	560	1460
SM16GA-09-60D-827-03	2700K	60°	9W	560	570
SM16GA-09-25D-830-03	3000K	25°	9W	590	3260
SM16GA-09-36D-830-03	3000K	36°	9W	590	1540
SM16GA-09-60D-830-03	3000K	60°	9W	590	600

\*This fixture is also compatible with Soraa's 7.5W GU10 line of lamps. The 7.5W lamps are available in 10° beam spread. See Soraa's full GU10 lamp offering at <https://www.soraa.com/19-MR16-GU10#>

## Compatible Dimmers\*:

Full lists of dimmer compatibility data are available at <https://www.soraa.com/resources/compatibility>

WORKS WITH  
**SORAA**<sup>®</sup>