

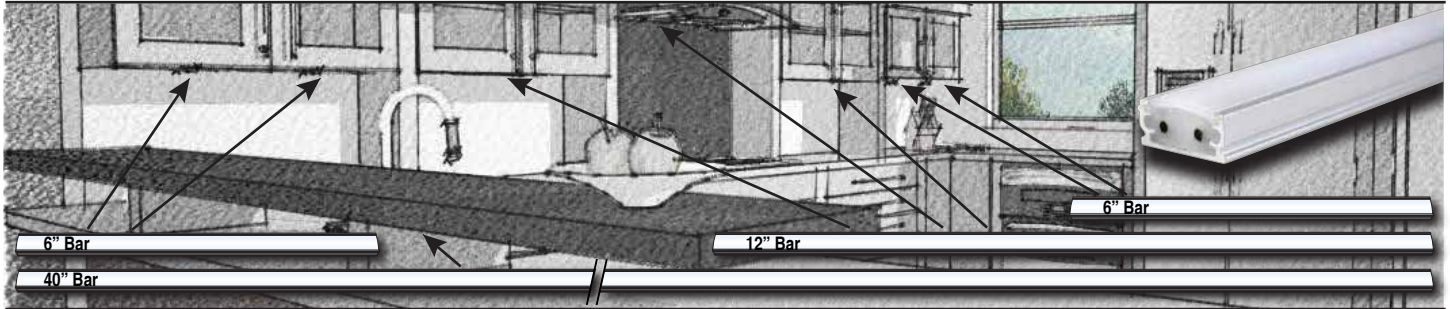



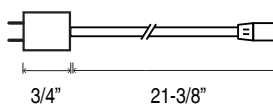


LL24HO-XXX - 24V Linkable Linear Lights



LL24HO Linkable Linear Lights

for even light output with no hot spots.



6" (5-7/8"), 12" (11-13/16"), and 40" (39-3/8") lengths

Power Feed

20" Jumper

Middle Connector

Corner Connector

Touch Switch

COLOR TEMPERATURE



CALCULATIONS

CHOOSE ACCESSORIES / INDICATE QUANTITY



3000K Warm White
LL24HO-6-830
4000K Natural White
LL24HO-6-840

VOLTAGE: 24V	WATTS: 3	QTY:
WATTAGE: 3W	\times	
MAX. RUN: 96W	= TOTAL WATTAGE:	
LUMENS: 210/225		



QTY:




QTY:

QTY:



3000K Warm White
LL24HO-12-830
4000K Natural White
LL24HO-12-840


VOLTAGE: 24V	WATTS: 5	QTY:
WATTAGE: 5W	\times	
MAX. RUN: 96W	= TOTAL WATTAGE:	
LUMENS: 375/410		



QTY:


QTY:

QTY:




3000K Warm White
LL24HO-40-830
4000K Natural White
LL24HO-40-840

VOLTAGE: 24V	WATTS: 15	QTY:
WATTAGE: 15W	\times	
MAX. RUN: 96W	= TOTAL WATTAGE:	
LUMENS: 1030/1100		



Connectors and linear bars have indicators to show the INPUT direction.

Middle connectors have a corresponding groove.

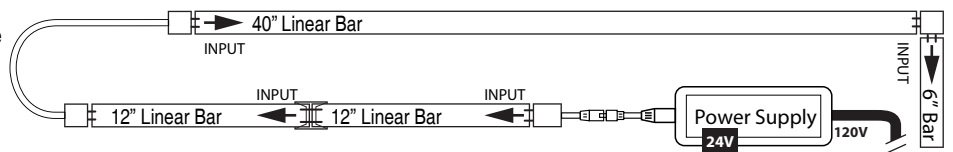

POWER SUPPLY (CLASS 2)*

DIMMING	PSU	PART #	INPUT	WATTAGE	OUTPUT	DIMENSIONS	WIRING	CALCULATIONS	QUANTITY
	96W 24V LED Power Supply	DR-96W24VDC-DIME	120V	96W MAX.	24VDC	L - 6.77" W - 2.67" H - 1.26"	HARDWIRE		

* smaller drivers, and non-dimming drivers are available.

