


STL-XX-XX-XX - Commercial Grade Outdoor String Lights

Product Features:

- Available in 50' (linkable) and 100' (non-linkable) lengths
- Three prong plug at start end on 4' lead
- Great for patio, decorative, festival and special event lighting applications




Suspended (4ft. lead with plug, 2ft. socket spacing)

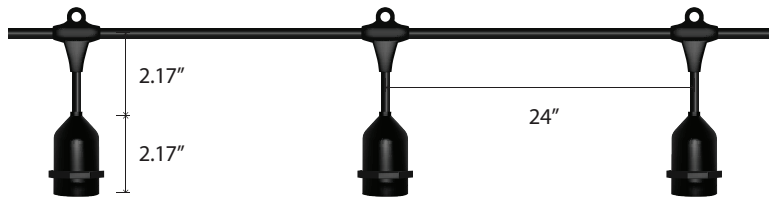

50 ft.
Suspended
STL-S-24-50
120V AC, MAX 600W
24 E26 medium base sockets
50' lengths can be plugged together

100 ft.
Suspended
STL-S-48-100
120V AC, MAX 1200
48 E26 medium base sockets

Non-Suspended (4ft. lead with plug, 2ft. socket spacing)

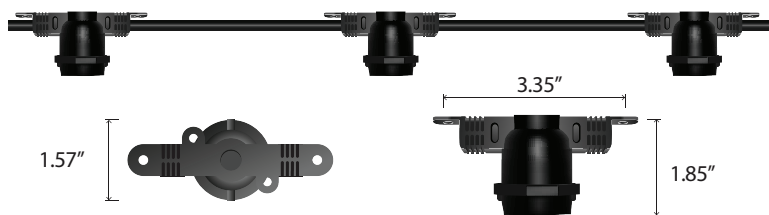

50 ft.
Non-Suspended
STL-NS-24-50
120V AC, MAX 600W
24 E26 medium base sockets
50' lengths can be plugged together

100 ft.
Non-Suspended
STL-NS-48-100
120V AC, MAX 1200
48 E26 medium base sockets

E26 Medium Base LED Bulbs



S14 - Frosted
TBL-E26-S14-FR
120V AC 1.4W E26 medium
Ø45 x H63mm
Ø1.75 x H3.50 in.



S14 - Clear
TBL-E26-S14-CLR
120V AC 1.4W E26 medium
Ø45 x H63mm
Ø1.75 x H3.50 in.



S14 - Dimmable Filament
TBL-E26-S14-FIL-LED
120V AC 2W E26 medium
Ø45 x H63mm
Ø1.75 x H3.50 in.



S11 - Frosted
TBL-E26-S11-FR
120V AC 1W E26 medium
Ø40 x H61mm
Ø1.57 x H2.40 in.



S11 - Clear
TBL-E26-S11-CLR
120V AC 1W E26 medium
Ø40 x H61mm
Ø1.57 x H2.40 in.

