

Date: _____	Job: _____	Type: _____
Notes: _____		Quantity: _____




The AL12035 downlight offers exceptional efficiency and performance in a small, design friendly fixture. With a lumen output of up to 725lm when lamped with Soraa GU10 LED lamps, the output is further enhanced by the faceted aluminum reflector. The AL12035 is IC and AirTight without a traditional box allowing design flexibility.

### Technical Specifications:

Input Voltage	110-130VAC
Power Consumption - Soraa lamped	9W
Lumens - Soraa lamped	490 - 725lm
Color Temperatures - Soraa lamped	2700K, 3000K, 4000K,
CRI - Soraa lamped	90 / 95
R9 Value - Soraa lamped	50 / 95
LED Life	35,000 hrs
Beam Angles - Soraa lamped	10°, 25°, 36°
Hole Cutout Diameter	3 5/8"
Dimming Type	Forward Phase
Dimming Performance (Lutron DVELV)	4%
Environment	Damp and Dry Location Rated
Ceiling Rating	IC & Airtight
Warranty	2 years

**Dimensions:**

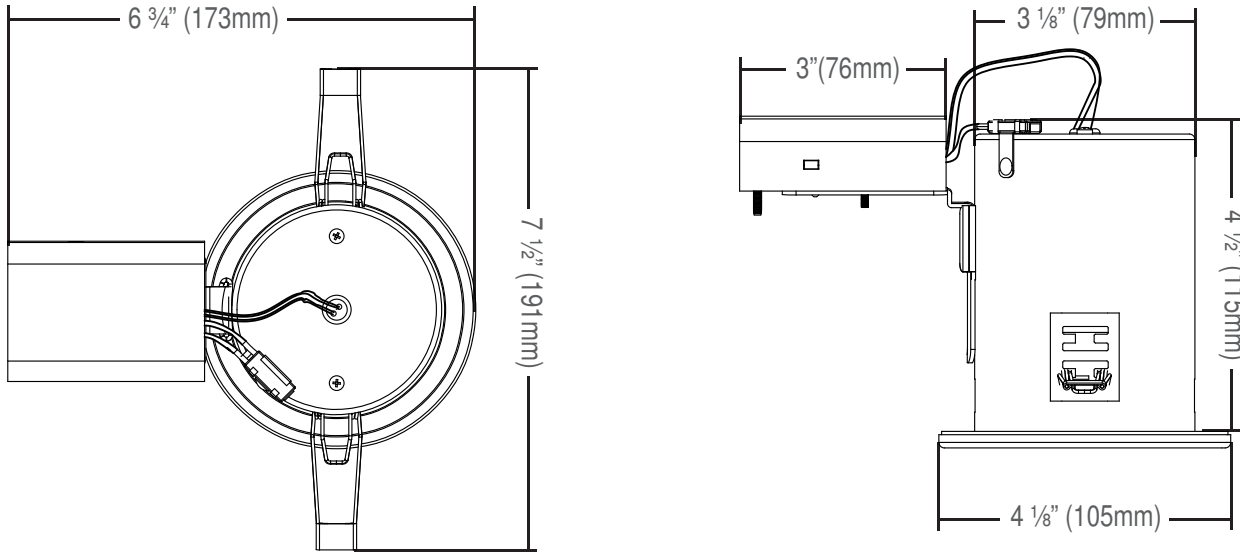

**Ordering Code:**

Fixture

Soraa Lamps



AL12035 -

Please go to [www.soraa.com](http://www.soraa.com) to see their latest lamp offering and part numbers.

**FINISH**

WH - White

BS - Brushed Steel

**Accessories:**

New Construction Mounting Plate  
NCMP 3625 - 3.625"

NCMP - 3625