

Date: _____	Job: _____	Type: _____
Notes: _____		Quantity: _____



WORKS WITH
SORAA

**TITLE
24
JA8
COMPLIANT**





The SL Series downlights are a versatile GU10 lamped LED downlight. IC rated and AirTight without a traditional box. With depths ranging from 3 1/2" - 4 1/4", they are perfect for drop ceilings, millwork or any place where ceiling space is limited. Lamped with Soraa LEDs you can be sure of the light quality.

Technical Specifications:



Input Voltage	110-130VAC
Power Consumption - Soraa lamped	9W
Lumens - Soraa lamped	490 - 725lm
Color Temperatures - Soraa lamped	2700K, 3000K, 4000K,
CRI - Soraa lamped	90 / 95
R9 Value - Soraa lamped	50 / 95
LED Life	35,000 hrs
Beam Angles - Soraa lamped	10°, 25°, 36°
Tilt (Adjustable fixtures)	25°
Dimming Type	Forward Phase
Dimming Performance (Lutron DVELV)	4%
Environment	Damp and Dry Location Rated
Ceiling Rating	IC & Airtight
Warranty	2 years

Dimensions:



SL12025

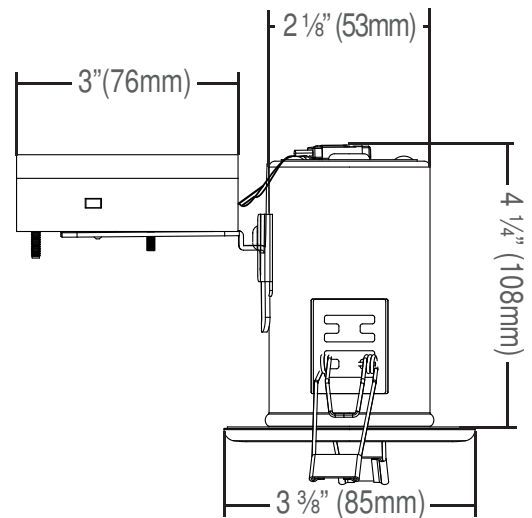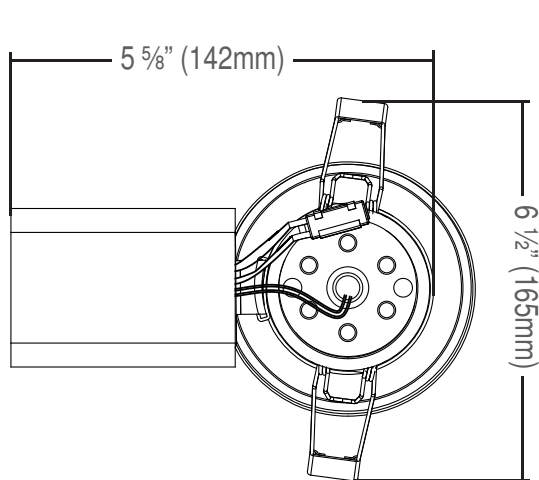

SL12025TI/TIF

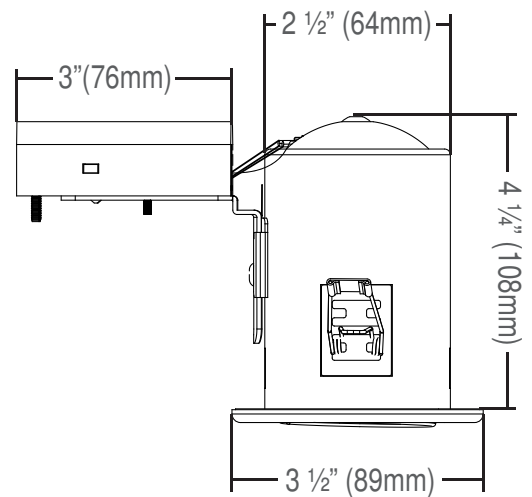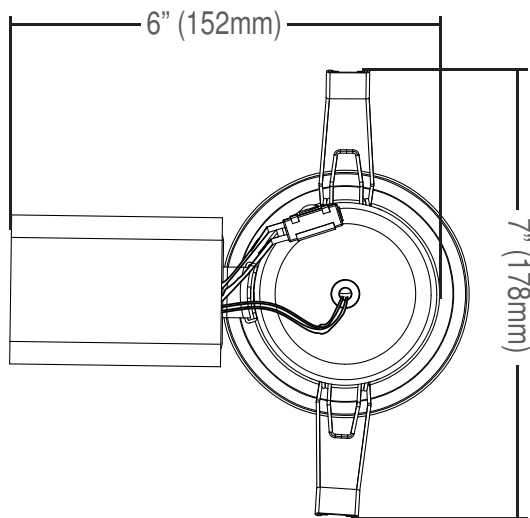

SL12025TL/TLF

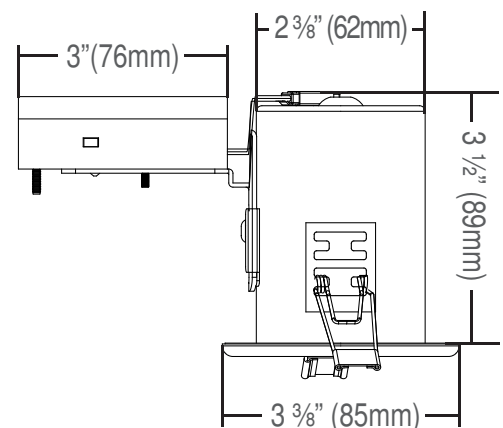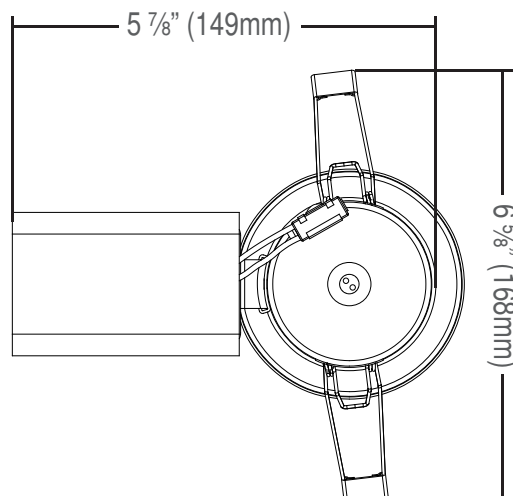

Ordering Code:**Fixture**

SL12025

 - - **TRIM**

- - Round
TI - Adjustable Round
TIF - Adjustable Square
TL - Round Twist Lock
TLF - SquareTwist Lock

FINISH

WH- White
BS - Brushed Steel
BL - Black
CH - Chrome
BZ -Bronze

Soraa Lamps

Please go to www.soraa.com to see their latest lamp offering and part numbers.

Accessories:**New Construction Mounting Plates**

- - **NCMP 2500** - 2.50"
TL/TLF - **NCMP 2750** - 2.75"
TI/TIF - **NCMP 3000** - 3.00"

NCMP

 - **HOLE SIZE**

2500 - 2.50"
2750 - 2.75"
3000 - 3.00"

Lensing**Wet Location Twist Lock - Shower lens**

TL/TLF - **WLTL-CLR/FR**

WLTL

 - **LENS**

CLR - Clear
FR - Frosted