

Date: _____	Job: _____	Type: _____
Notes: _____		Quantity: _____




The LL24HO linkable linear LED lights are an easy to install, plug and play product offering exceptional illumination, particularly in under cabinet applications. The outstanding lensing allows for an extremely thin housing while discreetly hiding the LED source behind it. The LL24HO is ideal for applications with reflective counter surfaces. The beam field reaches back and washes the back splash without having to point the light at the surface in order to highlight it.




Technical Specifications:

Input Voltage	24VDC
Power Consumption - 6" / 12" / 40"	3W / 5W / 15W
Lumens - 3000K / 4000K	375lm/ft / 410lm/ft
Efficacy (3000K)	75lm/W
Color Temperatures	3000K, 4000K
CRI	82
MacAdam Ellipse Binning	3-step
Beam Angle	100°
Beam Field	180°
Dimmable	Yes
IP Rating	IP20
Warranty	5 years


Dimensions/Ordering Codes:

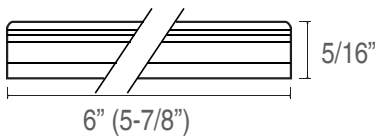



LL24HO-6

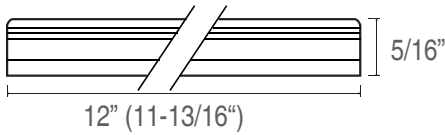


LL24HO-12

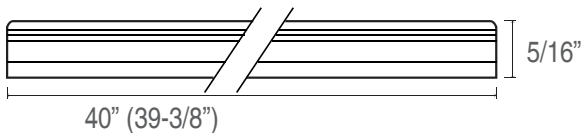


LL24HO-40




LL24HO-PF
Power Feed




LL24HO-TS
Touch Switch Power Feed



LL24HO-JP
20" Jumper





LL24HO-CC
Corner Connector



LL24HO-MC
Middle Connector

Installation:

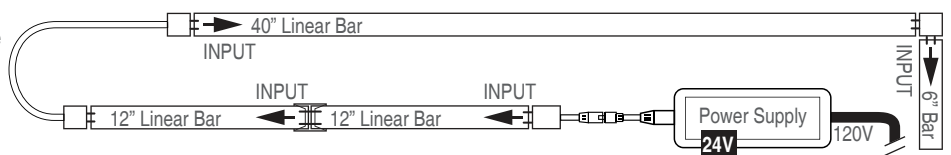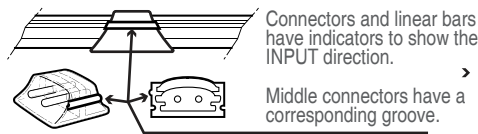

Drivers:

DESCRIPTION	INPUT	OUTPUT	WATTAGES	SPECIFICATION SHEETS
Non-Dimming Indoor/Outdoor	90-305VAC	24VDC	40W-480W	DR-24VDC-OUT
Phase Dimming Indoor	100-130VAC	24VDC	24W-60W	DR-24VDC-DIMA
0.5% & 1% Universal Dimming	100-277VAC	24VDC	30W-300W	DR-24VDC-DIMS-UNV