

PROJECT	TYPE	NOTES
---------	------	-------

**OVERVIEW**

The LL24HO linkable linear LED lights are an easy to install, plug and play product offering exceptional illumination, particularly in under cabinet applications. The outstanding lensing allows for an extremely thin housing while discreetly hiding the LED source behind it. The LL24HO is ideal for applications with reflective counter surfaces. The beam field reaches back and washes the back splash without having to point the light at the surface in order to highlight it.

IES FILES  **DOWNLOAD**




**TECHNICAL SPECIFICATIONS**

Input Voltage	24VDC
Power Consumption - 6"/12"/40"	3W / 5W / 15W
Lumens - 3000K / 4000K	275lm/ft / 345lm/ft
Efficacy (4000K)	69lm/W
Color Temperatures	3000K, 4000K
CRI	82
MacAdam Ellipse Binning	3-step
Beam Angle	100°
Beam Field	180°
Dimmable	YES
IP Rating	IP20
Warranty	5 years




### DIMENSIONS/ORDERING CODES



#### LL24HO-6

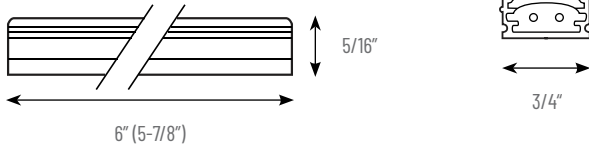


#### LL24HO-12

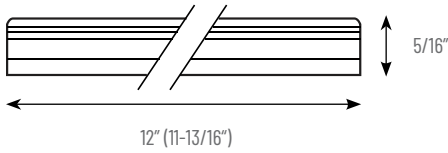


#### LL24HO-40

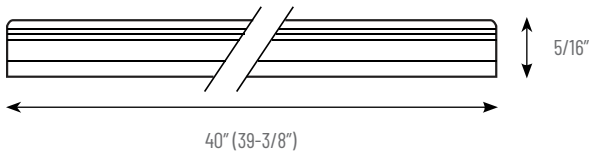


**LL24HO-PF**  
Power Feed



**LL24HO-TS**  
Touch Switch Power Feed



**LL24HO-JP**  
20" Jumper





**LL24HO-CC**  
Corner Connector



**LL24HO-MC**  
Middle Connector

### INSTALLATION

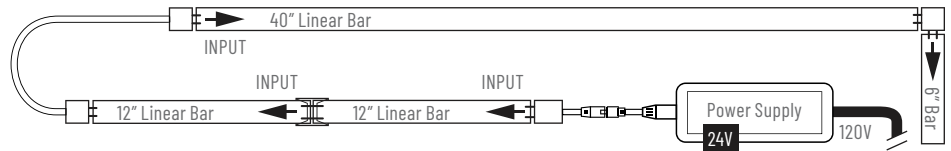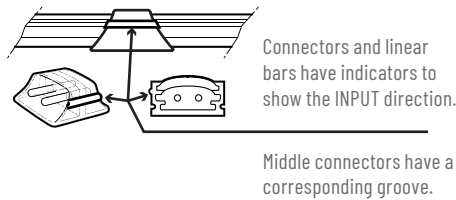

### DRIVER CUTSHEETS

DESCRIPTION	INPUT	OUTPUT	WATTAGES	SPECIFICATION SHEETS
Non-Dimming Indoor/Outdoor	90-305VAC	24VDC	40W-480W	DR-24VDC-OUT <a href="#">↓</a>
Phase Dimming Indoor	100-130VAC	24VDC	24W-60W	DR-24VDC-DIMA <a href="#">↓</a>
0.5% & 1% Universal Dimming	100-277VAC	24VDC	30W-300W	DR-24VDC-DIMS-UNV <a href="#">↓</a>

