

Date: _____	Job: _____	Type: _____
Notes: _____		Quantity: _____



The MWW121 LED walk way light uses a single chip COB and an acrylic lens. It's aluminum housing lends to its durability. These walk way lights are great for interior and exterior lighting applications.


IP67



Technical Specifications:

Operating Voltage	12VDC
Power Consumption	1W
Lumens Delivered (3000K)	63lm
Efficacy (3000K)	63lm/W
IES File (3000K)	
LED Chips	COB
Color Temperatures	2700K, 3000K, 4000K, 5000K
CRI	90+
MacAdam Ellipse Binning	3-step
Beam	30°
Dimmable	YES
Housing	Aluminum
Trims	304 Stainless Steel
Warranty	5 years


Dimensions:

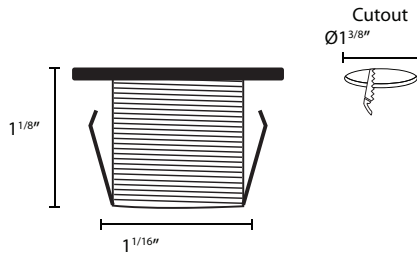

Trims:



SSS - Stainless Steel Round
Ø2.75"



SSS - Stainless Steel Square
1.54 x 1.54"



SS1 - Stainless Steel 1-Way
Ø1.80"



SS2 - Stainless Steel 2-Way
Ø1.80"

Ordering Code:

MWW121 - -





CCT

- 27K - 2700K
- 3K - 3000K
- 4K - 4000K
- 5K - 5000K

TRIM

- SSR - Stainless Steel Round
- SSS - Stainless Steel Square
- SS1 - Stainless Steel 1-Way
- SS2 - Stainless Steel 2-Way

Driver Cutsheets:

DESCRIPTION	INPUT	OUTPUT	WATTAGES	SPECIFICATION SHEETS
Non-Dimming Indoor	120VAC	12VDC	15W, 30W	DR-12VDC 
Non-Dimming Indoor/Outdoor	120VAC	12VDC	30W-264W	DR-12VDC-OUT 
Universal Phase Dimming Indoor	120VAC	12VDC	24W 48W 60W	DR-12VDC-DIMA 
Univ. Phase/0-10V Dimming Ind./Out.	100-277VAC	12VDC	30W-300W	DR-12VDC-DIMS-UNV 

Voltage Drop Calculator:

Wire Gauge Calculator - Load vs AWG vs Max. Distance Away From Driver

LOAD	10W	20W	30W	40W	50W	60W
WIRE GAUGE						
20AWG	18 ft	9 ft	6 ft	5 ft	4 ft	3 ft
18AWG	34 ft	17 ft	11 ft	8 ft	6 ft	5 ft
16AWG	54 ft	27 ft	18 ft	13 ft	10 ft	9 ft
14AWG	86 ft	43 ft	29 ft	21 ft	17 ft	14 ft
12AWG	134 ft	68 ft	45 ft	34 ft	27 ft	22 ft
10AWG	199 ft	99 ft	66 ft	49 ft	39 ft	33 ft