


Date: \_\_\_\_\_ Job: \_\_\_\_\_ Type: \_\_\_\_\_  
 Notes: \_\_\_\_\_



The TL24HO-NEON flexible LED neon is great for replacing existing neon and looks identical to traditional neon lighting in new applications. TL24HO-NEON brings the efficiency of LED technology and durability of modern materials. A robust copper flexible printed circuit board allows you long runs of 32.8ft, with no voltage drop. It is field cuttable every 2" allowing design flexibility. Constructed of UV and salt water resistant silicone and being IP66 rated allows this product to stand up to even the most challenging environments. If your project requires IP67 we also offer a Pool & Spa version. Illuminate your indoor and outdoor applications with confidence.

IP66

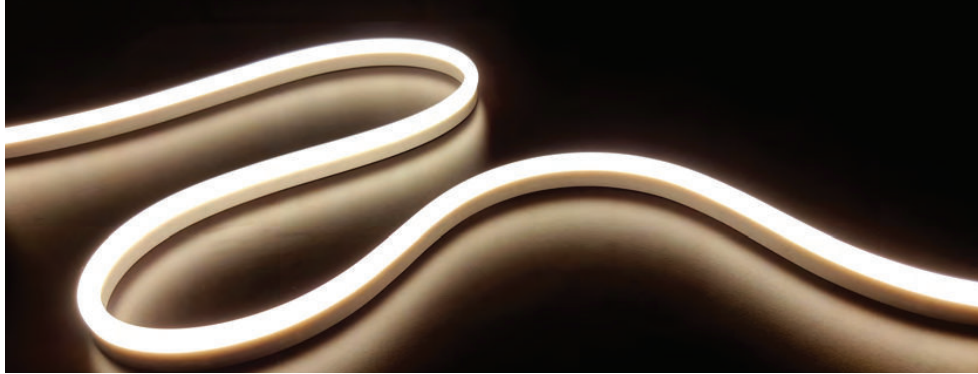

Top View




Side View



✕ Cuttable every 2" ✕

0.43"




0.94"


### Technical Specifications:

Operating Voltage	24VDC
Power Consumption	2.9W/ft
Lumens/ft (2700K)	178lm/ft
Efficacy (2700K)	62lm/W
Color Temperatures	2700K, 3000K, 4000K, 6500K, Custom CCT
Colors	Red, Green, Blue, Yellow, Custom color
CRI	85+
Beam Spread	220°
LED Life	60,000 hrs
Cuttable Increments	2.0"
Minimum Bend (side) Radius	2.0"
Maximum Run Length	32.8'
Warranty	5 years


Mounting and Installation Accessories:




TL24HO-NEON-CL - Stainless steel clip **CL**

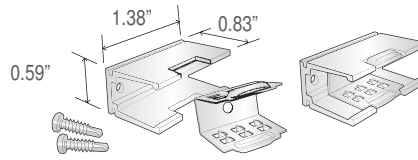


TL24HO-NEON-CLA - Clip with aluminum mount **CA**




TL24HO-NEON-AC - Aluminum channel




TL24HO-NEON-PFB - Power feed bottom **FB**



TL24HO-NEON-PFI - Power feed inline **FI**




TL24HO-NEON-IC - In-line connector **IC**

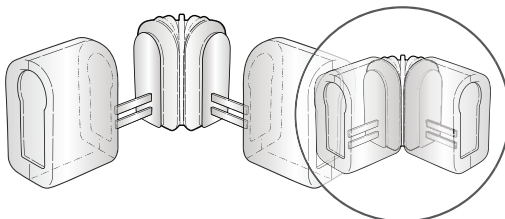


TL24HO-NEON-CC - 90° Corner connector **CC**



TL24HO-NEON-EC - End cap

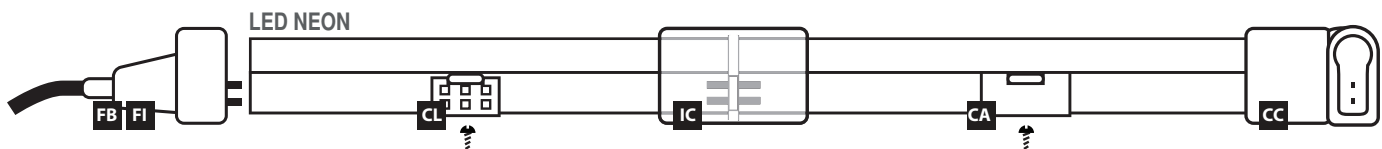

Ordering Code:








**CCT / COLOR**  
 27 - 2700K  
 30 - 3000K  
 40 - 4000K  
 65 - 6500K  
 RD - Red  
 GR - Green  
 BL - Blue  
 YL - Yellow  
 XX - Custom

**ROLL LENGTH**  
 10 - 10M/32.8ft  
 XX - Custom

- Leave blank for standard IP66  
**PS** - Pool & Spa IP67

Driver Cutsheets:

DESCRIPTION	INPUT	OUTPUT	WATTAGES	SPECIFICATION SHEETS
Non-Dimming Indoor/Outdoor	90-305VAC	24VDC	40W-480W	<a href="#">DR-24VDC-OUT</a> 
Universal Phase Dimming Indoor	120VAC	24VDC	24W/48W/60W	<a href="#">DR-24VDC-DIMA</a> 
Universal Phase Dimming In/Outdoor	120VAC	24VDC	96W	<a href="#">DR-96W24VDC-DIMB</a> 
Universal Phase Dimming Indoor	100-277VAC	24VDC	150W/300W	<a href="#">DR-24VDC-DIMS</a> 
0-10V Dimming Indoor/Outdoor	90-305VAC	24VDC	40W-480W	<a href="#">DR-24VDC-DIMW-0-10V</a> 

Voltage Drop Calculator:

Wire Gauge Calculator - Load vs AWG vs Max. Distance Away From Driver

LOAD	10W	20W	30W	40W	50W	60W	70W	80W	90W	100W
<b>WIRE GAUGE</b>										
<b>20AWG</b>	85 ft	43 ft	27 ft	21 ft	17 ft	14 ft	12 ft	11 ft	9 ft	8 ft
<b>18AWG</b>	134 ft	68 ft	45 ft	33 ft	27 ft	22 ft	19 ft	17 ft	15 ft	14 ft
<b>16AWG</b>	215 ft	109 ft	72 ft	54 ft	43 ft	36 ft	31 ft	27 ft	24 ft	22 ft
<b>14AWG</b>	345 ft	174 ft	115 ft	86 ft	69 ft	57 ft	49 ft	43 ft	39 ft	36 ft
<b>12AWG</b>	539 ft	272 ft	181 ft	135 ft	108 ft	90 ft	77 ft	68 ft	61 ft	56 ft
<b>10AWG</b>	784 ft	394 ft	263 ft	197 ft	158 ft	131 ft	112 ft	98 ft	87 ft	82 ft