

PROJECT	TYPE	NOTES
OVERVIEW <p>The LL1, one inch landscape LED lights are solidly constructed of corrosion resistant brass and 316L stainless steel. They can Withstand the most challenging environments. The LL1 fixtures have an impact rating of IK10 and have multiple mounting options Use them in conjunction with our IG1 inground lights to get light consistency across your landscape lighting applications.</p>		




TECHNICAL SPECIFICATIONS

Operating Voltage	24VDC
Power Consumption SO/HO	1W
Lumens Delivered (3000K)	21lm
Efficacy (3000K)	21lm/W
LED Chips	SMD
Color Temperature	RGBW (3000K)
CRI	80+
Beam	23°, 36°, 60°
Dimmable	YES
Housing	Solid Brass
Trims	Solid Brass
IP Rating	67
Impact Rating	IK10
Warranty	5 years



DIMENSIONS Comes with 36" lead

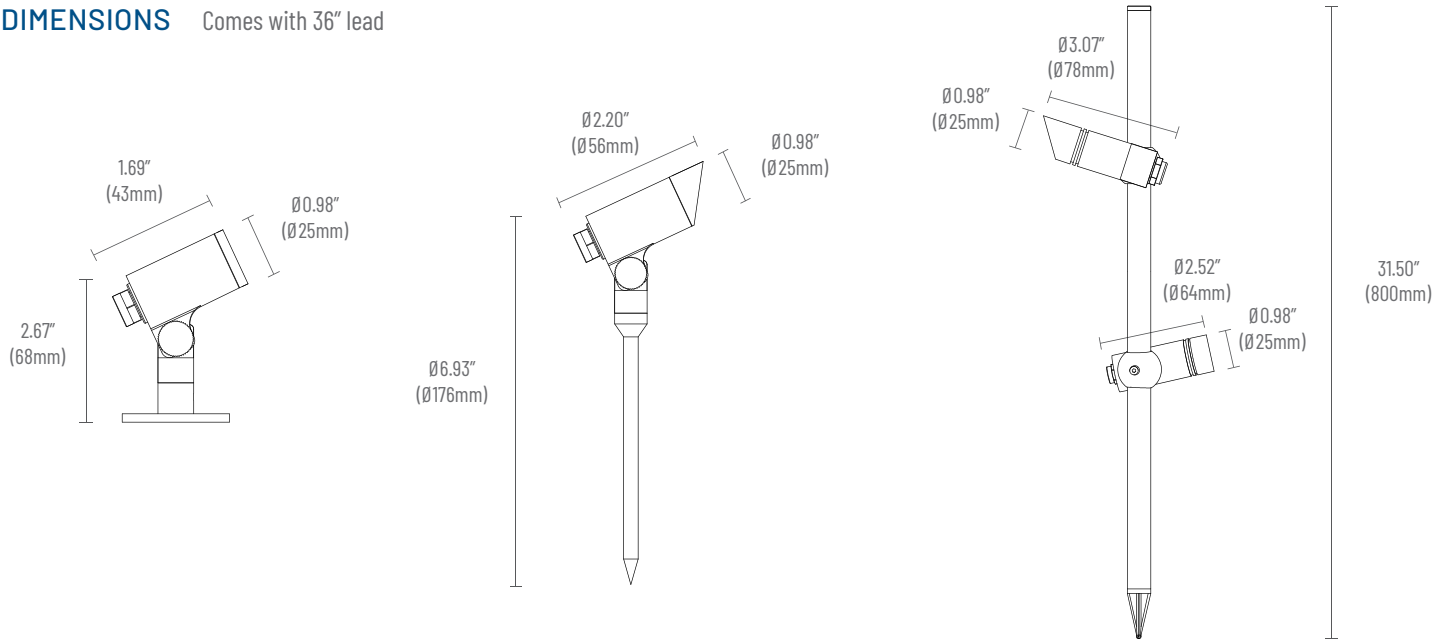

FINISHES



AB - Antique Brass



BL - Matte Black



NB - Natural Brass

TRIMS



SN - Snoot
Ø0.98"



CW - Cowl
0.98" x 0.98"

MOUNTING



SFC - Surface



SPK - Spike



ROD - Rod

ORDER CODE

LL1	241	RGBW	-	-	-	-	-
-----	-----	------	---	---	---	---	---

TRIM

SN - Snoot

CW - Cowl

BEAM

23 - 23°

36 - 36°

60 - 60°

ACCESSORIES

HC - Honeycomb

DL - Diffusion Lens

FINISH

AB - Antique Brass

BL - Matte Black

NB - Natural Brass





MOUNTING

SFC - Surface

SPK - Spike

ROD - Rod

DRIVER CUTSHEETS

DESCRIPTION	INPUT	OUTPUT	WATTAGES	SPECIFICATION SHEETS	
Non-Dimming Indoor/Outdoor	110-305VAC	24VDC	30W-480W	DR-24VDC-OUT	
RGB/W Controller Indoor	12-36VDC	12-36VDC	768W max.	DR-RGBW-WIFI-CON	
RGB/W Controller Outdoor	12-24VDC	12-24VDC	480W max.	DR-RGBW-WIFI-CON-OU	
RGB/W DMX Controller	12-24VDC	12-24VDC	N/A	DR-DMX-RGBW-WIFI-CON	
5 Channel DMX Decoder	12-24VDC	12-24VDC	960W max.	DR-DMX-5CH-DEC	