




PROJECT	TYPE	NOTES
---------	------	-------

**OVERVIEW**

The MSW4 LED step/wall light is a discreet flushmount fixture. It has a recessed light source which is hidden from view. These step/wall lights are great for interior and exterior step lighting applications.

[IES FILE \(3000K\)](#)  [DOWNLOAD](#)




**TECHNICAL SPECIFICATIONS**

Operating Voltage	12VDC
Power Consumption	1W
Lumens Delivered (3000K)	13lm
Efficacy (3000K)	13lm/W
LED Chips	COB
Color Temperatures	3000K
CRI	90+
MacAdam Ellipse Binning	3-step
Beam	60°
Dimmable	YES
Housing	Aluminum
Warranty	5 years



DIMENSIONS

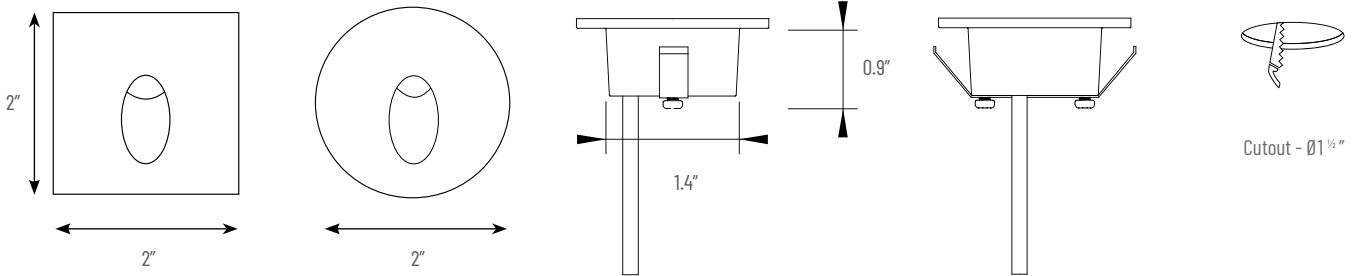

ORDER CODE

MSW4	121	3K	-	-
------	-----	----	---	---





TRIM

- RD - Round
- SQ - Square

FINISH

- BL - Black
- BS - Brushed Steel
- WH - White

DRIVER CUTSHEETS

DESCRIPTION	INPUT	OUTPUT	WATTAGES	SPECIFICATION SHEETS
Non-Dimming Indoor	120VAC	12VDC	15W, 30W	DR-12VDC 
Non-Dimming Indoor/Outdoor	120VAC	12VDC	30W-264W	DR-12VDC-OUT 
Universal Phase Dimming Indoor	120VAC	12VDC	24W 48W 60W	DR-12VDC-DIMA 
Univ. Phase/0-10V Dimming Ind./Out.	100-277VAC	12VDC	30W-300W	DR-12VDC-DIMS-UNV 

VOLTAGE DROP CALCULATOR Wire Gauge Calculator - Load vs AWG vs Max. Distance Away From Driver

LOAD (WIRE GAUGE)	10W	20W	30W	40W	50W	60W
20AWG	18 ft	9 ft	6 ft	5 ft	4 ft	3 ft
18AWG	34 ft	17 ft	11 ft	8 ft	6 ft	5 ft
16AWG	54 ft	27 ft	18 ft	13 ft	10 ft	9 ft
14AWG	86 ft	43 ft	29 ft	21 ft	17 ft	14 ft
12AWG	134 ft	68 ft	45 ft	34 ft	27 ft	22 ft
10AWG	199 ft	99 ft	66 ft	49 ft	39 ft	33 ft

